


PWT 2i-R

NEW CONSTRUCTION GUIDE*

The technician will connect to the drain before the trap.

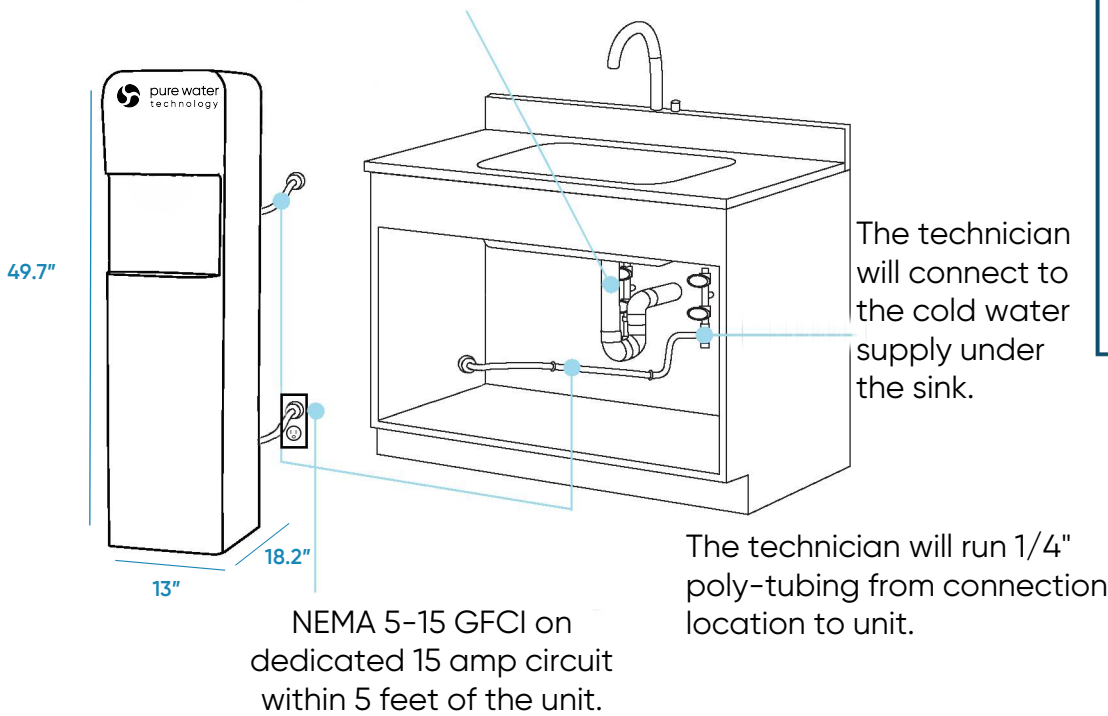

Special Notes:

- o Unit can be up to 50 feet away from source and drain.
- o Drain water is from the filters and has pressure behind it; no need for a pump.
- o Drip tray does not drain.

Description	Specification
Weight	62 lbs (42 kgs)
Dimensions	14" W x 17" D x 50.5" H (355.6mm W x 431.8mm D x 1270mm H)
Cold Tank Capacity	3 gallons (11 Liters)
Hot Tank Capacity	0.5 gallons (1.8 Liters)

Description	Specification
Dispense Area	10.1" H (256mm H)
Reverse Osmosis Membrane Capacity	80 gallons per day
Recommended Water Pressure	Do not exceed 60 psi
Rated Voltage/Frequency	120v/60hz 220v/50hz
Power Consumption	Hot: 4.0A/410W Cold: 1.5A/110W

*This is only a suggested guide. Please consult your technician or building supervisor for further guidance.