


PWT blüV-R

NEW CONSTRUCTION GUIDE*

The technician will connect to the drain before the trap.

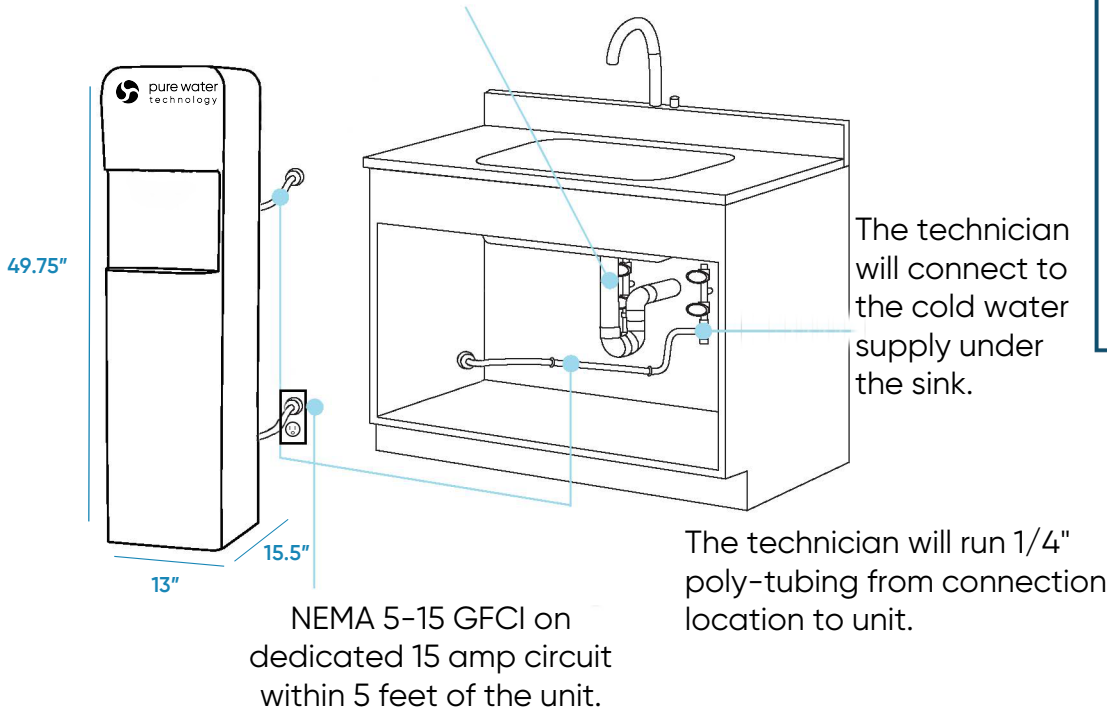

Special Notes:

- o Unit can be up to 50 feet away from source and drain.
- o Drain water is from the filters and has pressure behind it; no need for a pump.
- o Drip tray does not drain.

Description	Specification
Weight	56 lbs (25.4 kgs)
Dimensions	13" W x 15.5" D x 49.75" H (330.2mm W x 394mm D x 1264mm H)
Cold Tank Capacity	1.3 gallons (4.9 Liters)
Hot Tank Capacity	0.5 gallons (1.8 Liters)

Description	Specification
Dispense Area	9" H (229mm H)
Reverse Osmosis Membrane Capacity	80 gallons per day
Recommended Water Pressure	Do not exceed 100 psi
Rated Voltage/Frequency	120v/60hz 220v/50hz
Power Consumption	Hot: 300W Cold: 100W

*This is only a suggested guide. Please consult your technician or building supervisor for further guidance.