



# S18

COUNTERTOP


Expect more with this high-capacity solution that delivers **premium chilled, sparkling, and ambient water on demand.**

This advanced system produces up to 180 liters per hour\* of chilled, ambient or sparkling water, perfect for high volume applications including hotels and restaurants.

Featuring an 11" dispense height, rapid cold carbonation, and manual faucets for dependable dispensing, the S18 makes quick, efficient bottle-filling an easy task for any user.

### System Highlights:

- 3-tap dispensing features cold, sparkling, and ambient water
- 4-Stage advanced filtration system easily mounts inside the unit for easy installation and service
- Ice bath cooling technology for a high-volume of cold water
- Large capacity drip tray engraved with water type to facilitate accurate bottle positioning

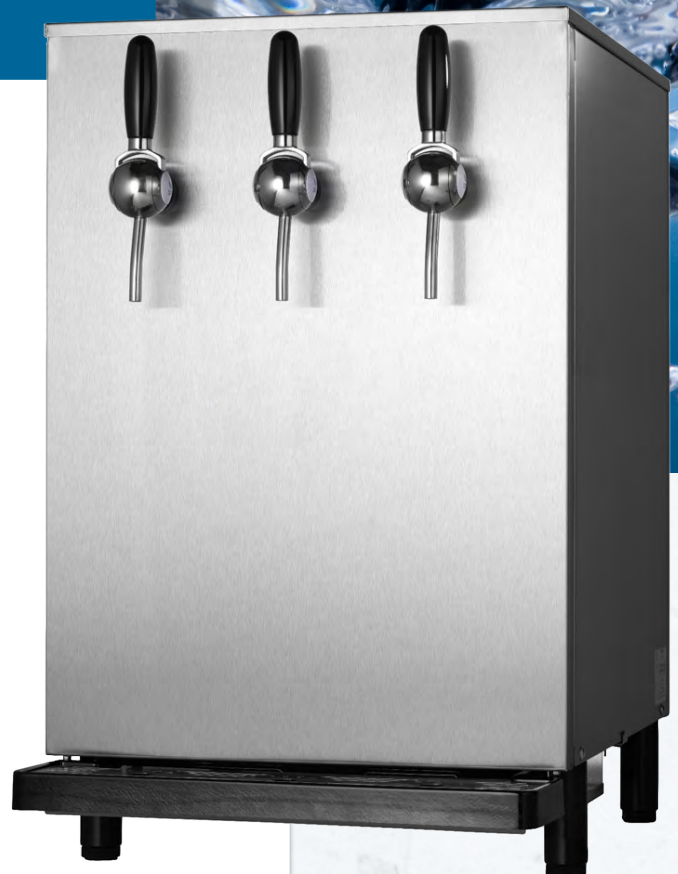

\*Capacity dependent on source water temperature

The S18 distinguishes itself as a **high-end system**, offering generous capacity and exceptional quality for both **still and sparkling water**.

### Features:

- Unrivaled 22lb ice bank chills a higher volume of cold water
- Dispense height of 11" accommodates large reusable bottles
- Utilizes R290 environmentally friendly natural refrigerant
- Equipped with a 1.7 liter sparkling tank
- Programmable flow meter tracks usage and allows more consistent scheduled service and filter changes
- Heavy duty rotary faucets allow for pressure and flow control to limit splashing
- Easily connects to external CO<sub>2</sub>\*

\*CO<sub>2</sub> regulator is included



Height	27.4 in
Width	22.4 in
Depth	17.1 in
Depth with Drip Tray	23.6 in
Rear Ventilation Clearance**	2 in
Dry Weight	110 lbs
Ice Bank	22 lbs
Chilling Capacity	180 L/hr*
Maximum Flow Capacity	240 L/hr
Power Voltage   Frequency   Running Amps	115V   60 Hz   7 Amps
CO <sub>2</sub> Specification	Available hookup for external CO <sub>2</sub> tank or bulk CO <sub>2</sub> supply. Connected with ¼" poly tubing to the regulator. Operates at 55 psi.
Water Supply / Pressure PSI (Bar)	¾" Poly Tubing for water connection 40 psi min – 60 psi max (2.75 – 6.9 bar)

\*Capacity dependent on source water temperature  
\*\*Allow clearance on top and left side of dispenser for maintenance



630 Allendale Road, Suite 200  
King of Prussia, PA 19406  
855.474.7934  
PureWaterTech.com

Certified by IAPMO in accordance with ANSI/NSF 372 for lead free products and certified by IAPMO R&T in accordance with UL 399 and CSA 22.2 for electrical safety.  
NSF61, CSA B483.1